

**Blyg**  
CORROSION

## **PoluAI XT-MB**

---

- ✓ Hygienic
- ✓ Micro organism resistant
- ✓ Corrosion resistant
- ✓ Heat conductive

## Blygold PoluAl XT-MB - Corrosion protection & Microbe resistant

Heat exchangers used to cool down an airstream or room are often exposed to corrosive environments and microbiological growth. The condensation on the fins and the airborne pollution create the perfect conditions for corrosion and microbiological growth .

In these times hygiene is a very important thing. Instead of diving into “new” technology or devices look at your existing HAVC unit. Blygold can help you to get this hygienic again.


Blygold can deep clean your HVAC unit and the evaporator can be coated with Blygold PoluAl XT-MB.

The quickest way to have a great hygiene environment again.


Much more cost effective than buying “new” technology or devices.

Simple, quick and at your service.

### WITH POLUAL XT-MB

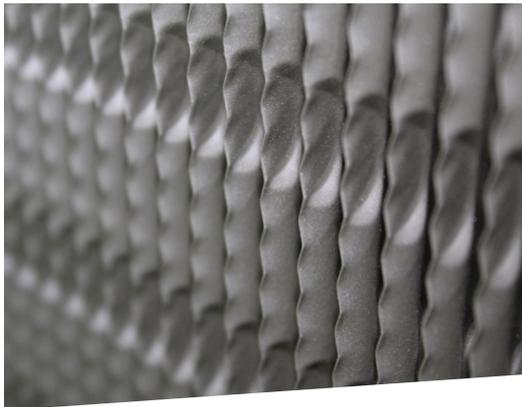

### WITHOUT POLUAL XT-MB

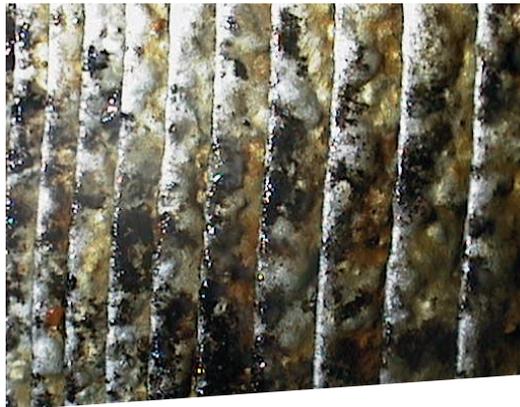


### Special Coating

Blygold PoluAl XT-MB is a corrosion protective coating for cooling coils and evaporators. The coating shields vulnerable metals from aggressive environments. The aluminium content in the coating provides the necessary heat conductivity to make sure that coated heat exchangers have an optimal cooling capacity. Special additives ensure the applied coating film is bacteria and fungi resistant. After treating evaporators or cooling coils these articles should be considered “treated articles” and labeled as such. The efficiency of the coating to resist bacteria and fungal growth has been tested and is available upon request.

- ✓ Corrosion resistant
- ✓ Micro organism resistant
- ✓ Heat conductive
- ✓ 11000 h salt spray test
- ✓ Nano free
- ✓ Hygienic

**Special application**

A good coating will only perform when applied in a high quality process. Coating heat exchangers requires specialists that are able to apply the coating on every piece of bare metal present in a heat exchanger. Blygold uses proprietary spray techniques that can only be practiced by certified applicators. These qualified applicators are required to make sure a corrosion and micro-organism resistant heat exchanger is created. This is preferably done in a conditioned Blygold workshop but is, under restricted circumstances, also possible on-site.

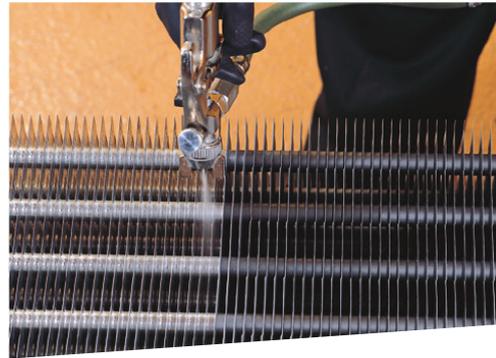


**TECHNICAL INFORMATION**

<b>Coating type:</b>	Aluminium pigmented Polyurethane
<b>Colour:</b>	Champagne
<b>Pre-treatment:</b>	Degreasing with Coil Clean AP
<b>Temperature Range (dry):</b>	-20 to 150°C (-4 to 302°F)
<b>Substrates:</b>	Aluminium, Copper, Galvanized steel
<b>ASTM B117:</b>	11000+ hours (neutral-salt spray test)
<b>ASTM G85 A1:</b>	4000+ hours (acid-salt spray test)
<b>Layer Thickness:</b>	25-30 µm (1 mil)
<b>Bacteria resistance JIS Z 2801:</b>	2010 : log reduction 4.3
<b>Fungi resistance Din EN ISO 846 method B :</b>	Strong fungi static effect
<b>Pressure Drop:</b>	0-5 % (depending on fin geometry)
<b>Thermal Resistance:</b>	0-3 % (depending on fin geometry)
<b>Application:</b>	Qualified Blygold Applicator
<b>UV Resistance:</b>	Excellent
<b>Adhesion (cross hatch):</b>	0 (European) 5b (USA)
<b>Applications:</b>	Chilled water and evaporator Heat Exchanger coils
<b>Chemical Resistance:</b>	Excellent (as per resistance list)

*A good coating will only perform when applied in a high quality process*

<b>Without PoluAL XT-MB</b>	
Bacteria (CFU/cm <sup>2</sup> )	14000
Fungi (growth intensity)	4
<b>With PoluAL XT-MB</b>	
Bacteria (CFU/cm <sup>2</sup> )	1,4
Fungi (growth intensity)	0,0

**Micro-organism growth**

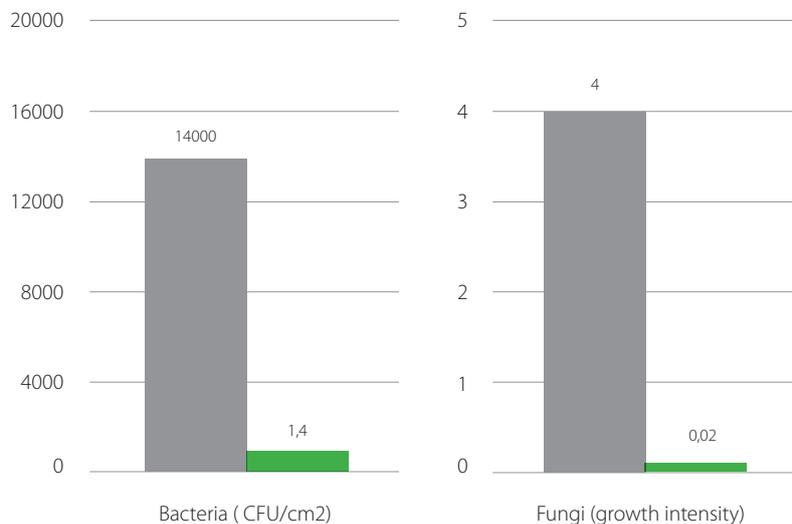



**BLYGOLD INTERNATIONAL**

**Blygold is an innovative and forward-thinking company offering unique and sustainable high-quality protection against corrosion. With over 40 years experience, we have the know-how and state-of-the-art products and techniques to solve any corrosion problem. Our multitude of success stories says it all.**

### **Application protocols**

Because of the specific geometry of heat exchangers, the quality of the application process is just as important as the applied product. Blygold has developed specific application protocols for heat exchangers of all different dimensions, geometries and materials.

### **Global network**

To ensure our products are applied according to these protocols, Blygold works with trained and certified applicators only. Our global network of qualified Blygold applicators can offer local support in over 60 countries around the world.



### **Quality**

- ✓ Over 40 years of experience
- ✓ Unique application techniques
- ✓ Unrivalled test results
- ✓ All trained & qualified applicators
- ✓ ISO 9001 Certified



### **Innovation**

- ✓ Revolutionary R&D
- ✓ Inhouse laboratory
- ✓ Thorough understanding of the market
- ✓ Global awareness of customer needs
- ✓ Problem solving mentality



### **Sustainability**

- ✓ Lifetime extension
- ✓ Energy saving & Eco Friendly
- ✓ Life Cycle Cost reduction
- ✓ Maintenance friendly
- ✓ Corporate Social Responsibility